




---

TRIVAC 700  
Pressure Pool Cleaner  
owners manual

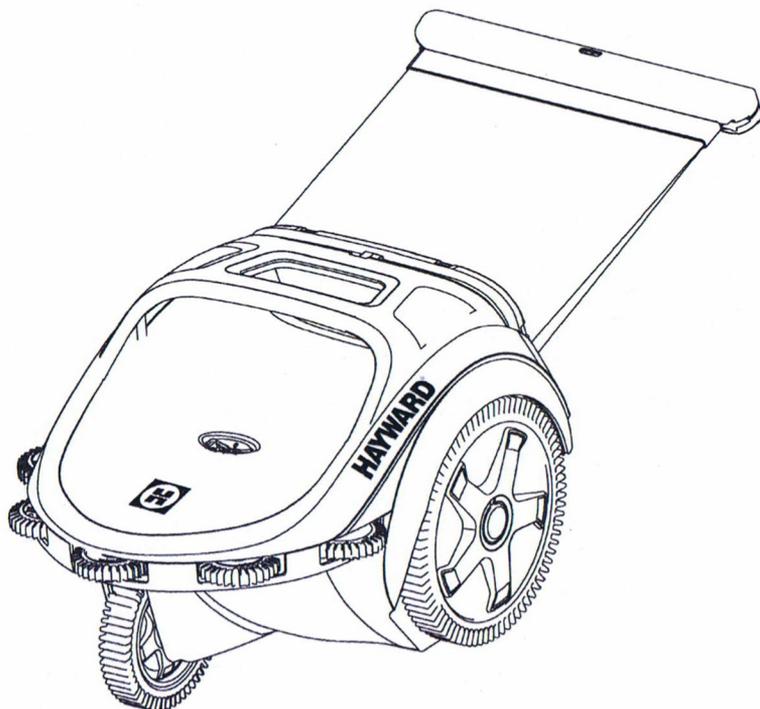

# SAFETY FACTS

**DO NOT** use to remove large debris in new pools.

**REMOVE** the cleaner before chemically shocking your pool

**DO NOT** swim with cleaner

Store the cleaner in a shaded safe area


Hoses must be stored straight. **DO NOT** coiled the hose

Keep away from childrens and pets

**REMOVE** cleaner when performing backwash

**REMEMBER** safety first


## TOOLS

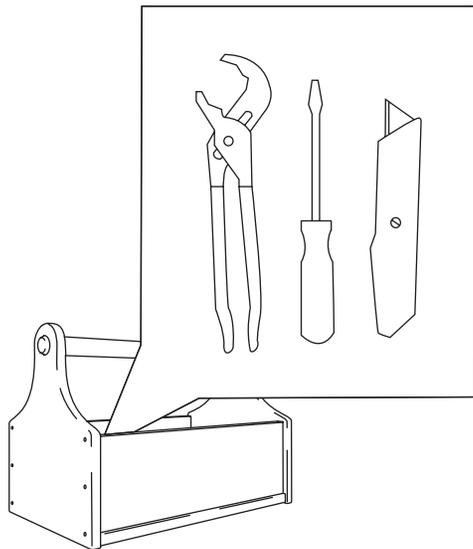


## LEGEND

-  Tip
-  Filtration pump
-  Pool chemicals
-  Warning
-  Booster pump


# CARTON CONTENTS

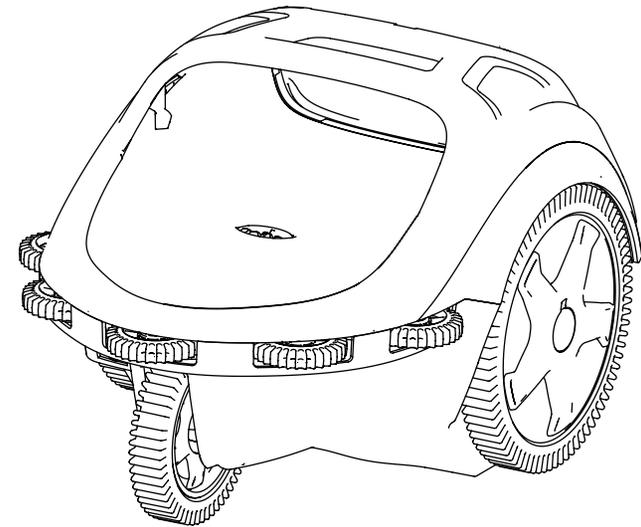


1x

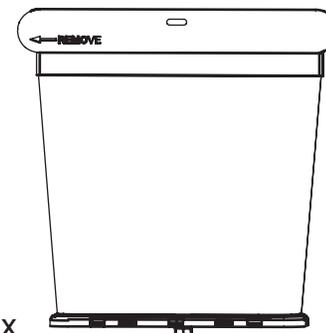

1x

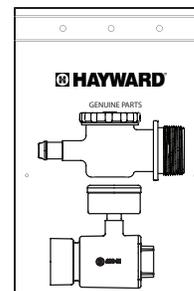


1x

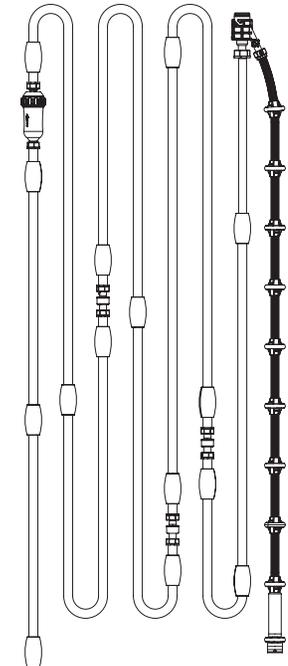


1x

# PREPARING THE POOL

Manually remove very large and excessive debris from pool (ie. post storm, spring cleaning / pool opening situations).

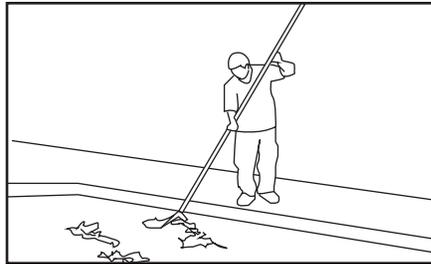

Perform a backwash, clean your filter, skimmer baskets and pump basket.

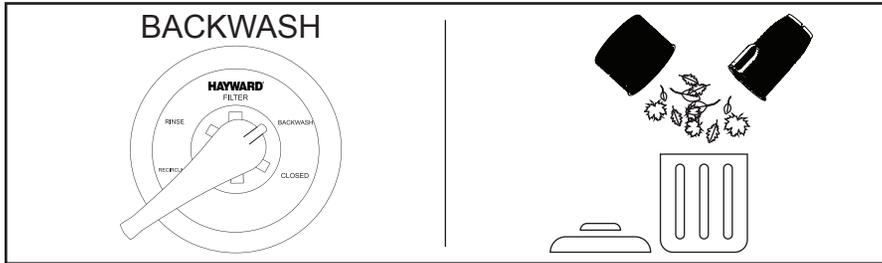


## POOL CHEMICALS




pH : 7.2 - 7.6  
 Chlorine : 0.5 - 1.5 P.P.M  
 Total Alkalinity : 80 - 150 P.P.M

## DEDICATED RETURN LINE


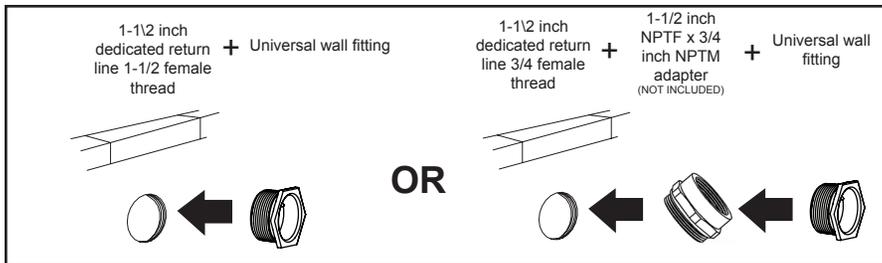


# CONNECTING THE TRIVAC


## INSTALLING WALL FITTING




When installing or re-installing the universal wall fitting use Teflon tape on its plastic threads.

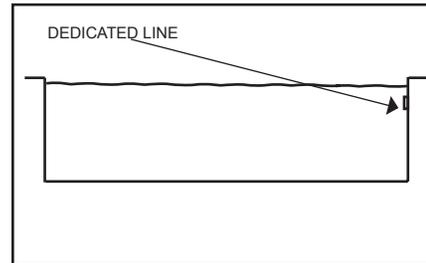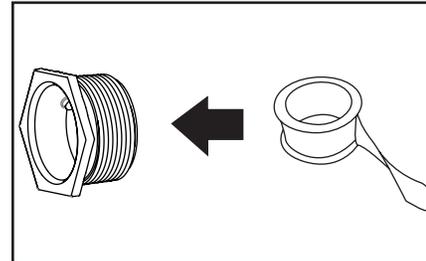

Remove plug or existing universal wall fitting from previously installed pool cleaner (if any).

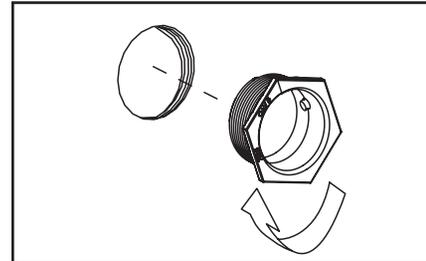

Screw the universal wall fitting into the dedicated line. (see p.4)

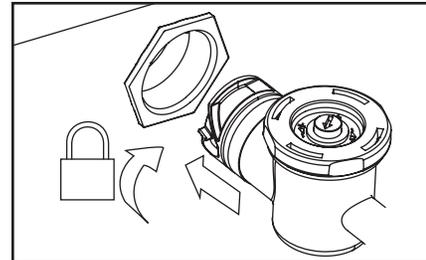


Connect pressure hose with the wall quick connect


# SIZING PRESSURE HOSE

## SIZING THE HOSE

Pull hose to farthest point of the pool.

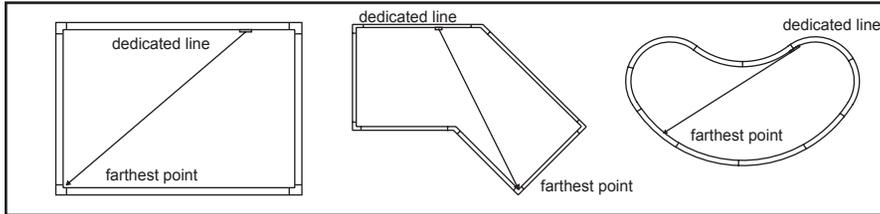


Measure from end of the hose to 2-3 ft over the edge of the pool.

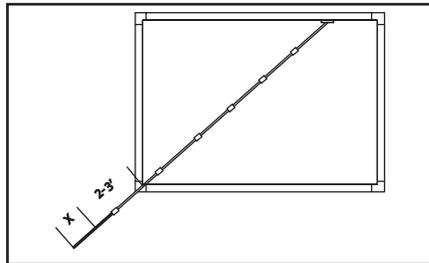


Disconnect the last portion of hose and cut the measured amount from the last section of the 8' hose.



DO NOT cut the sweep hose

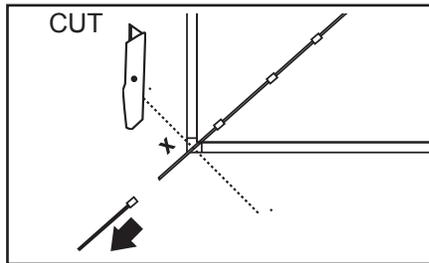


Reconnect the last hose portion.

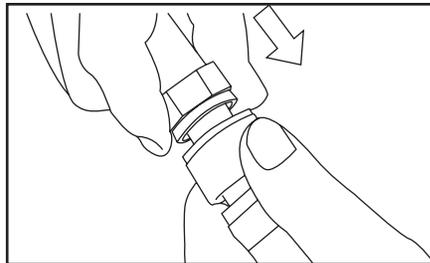


# DEBRIS BAG

## ATTACHING DEBRIS BAG

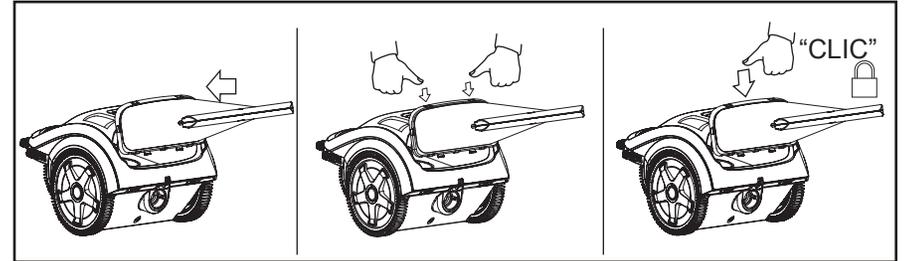


## REMOVING DEBRIS BAG

Pull the top of the debris bag frame back and then up.

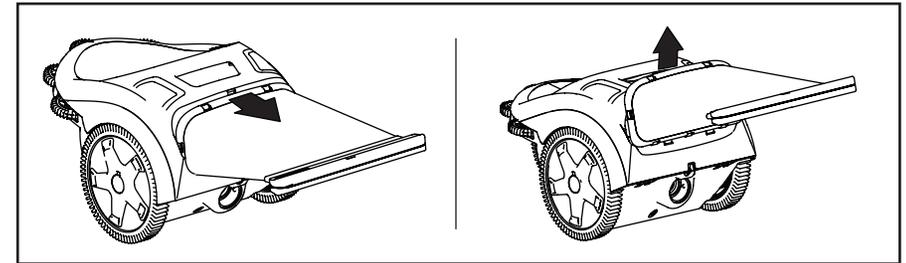

## CLEANING DEBRIS BAG

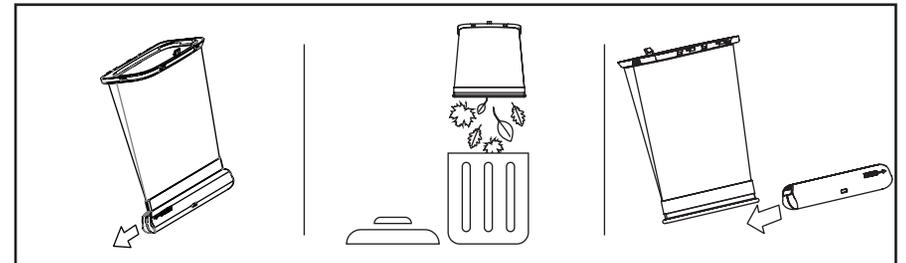

Full debris bag can reduce cleaner performance.




if you allow the bag to dry it will be easier to remove the debris



# SETTING PRESSURE



Too much pressure will cause poor cleaning and premature wear of cleaner parts.

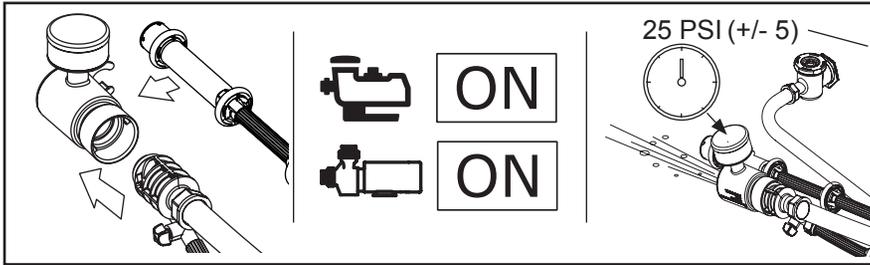


Use a flat blade screwdriver to adjust the wall quick connect knob to reach 25 PSI (+/- 5)

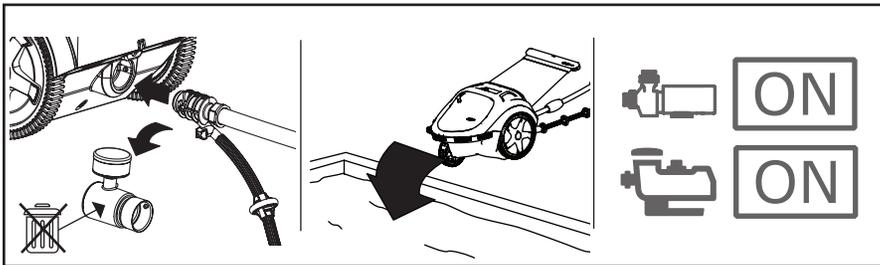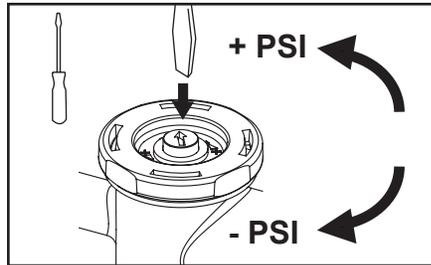

# OPERATING THE TRIVAC


## CHANGING BOTTOM TO SKIM

To skim the pool surface rotate the switch to the arrow up for the SKIM mode.

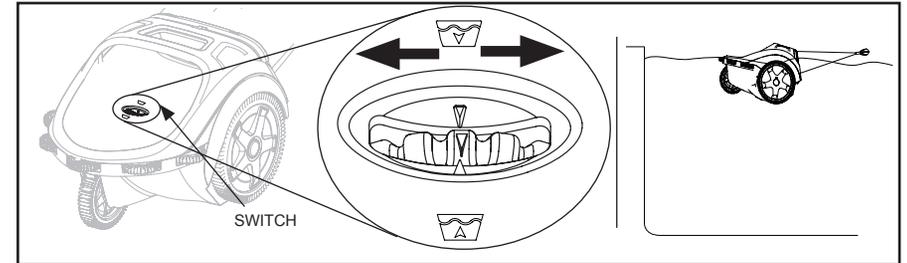

## CHANGING SKIM TO BOTTOM


To clean the bottom and sides of the pool rotate the switch to the arrow down for the BOTTOM mode

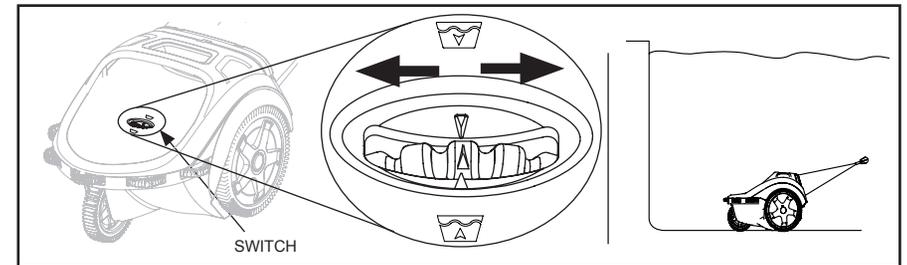


# ADJUSTING THE SWEEP HOSE

## ADJUSTING SWEEP HOSE POWER


SWEEP HOSE MOVE SLOWLY OR NOT AT ALL: turn the adjustment knob counter-clockwise to increase sweep hose power.

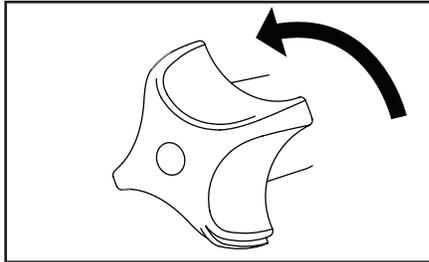

SWEEP HOSE FREQUENTLY SPRAYS OUT OF THE POOL: turn the adjustment knob clockwise to reduce sweep hose power.

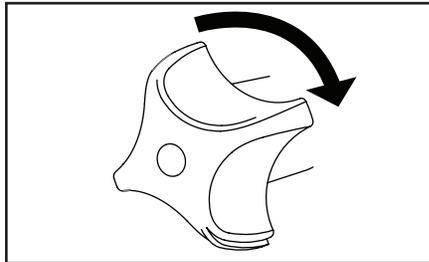


Note: Do not turn the sweep hose completely off. This can cause the hose to tangle or knot.

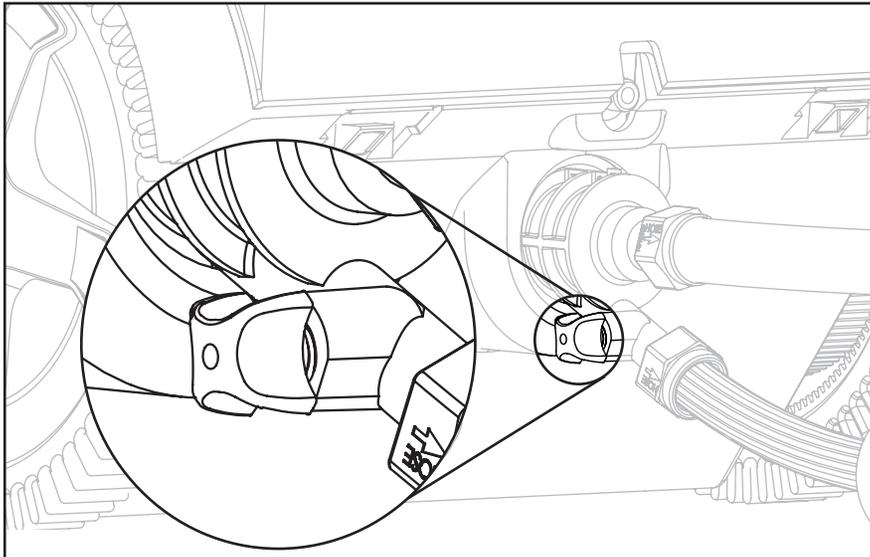

# MAINTENANCE



## REMOVE CLEANER FROM POOL

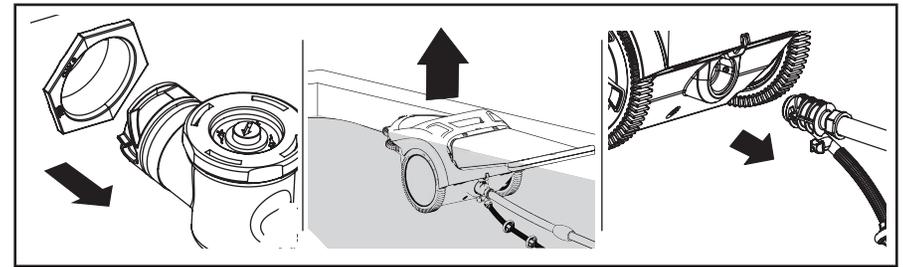

## CLEANING THE IN-LINE FILTER



if the screen frequently becomes plugged, the filtration system is not performing properly or there is another plumbing problem.

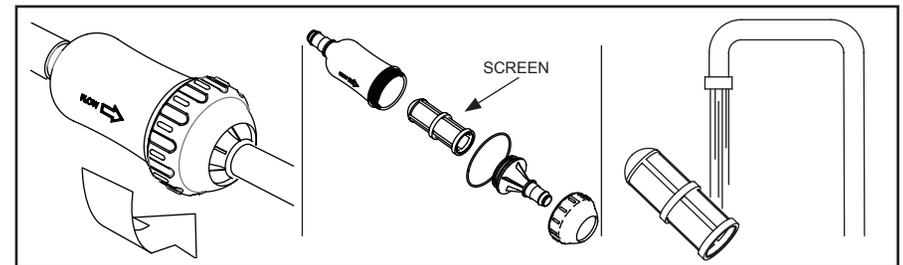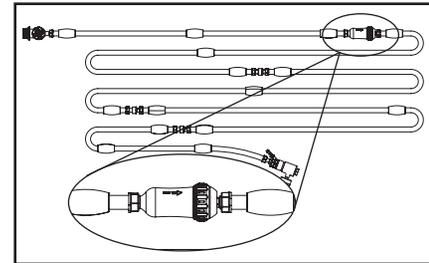


Make sure the o-ring is in place and properly seated.

# REPLACING PARTS

## SWEEP HOSE


If a hole forms in the sweep hose, it should be replaced. Unscrew the mender nut from the hose and pull the sweep hose off the cleaner connector. Attach a new sweep hose to the cleaner connector.

PART NUMBER: AX5000RSHA

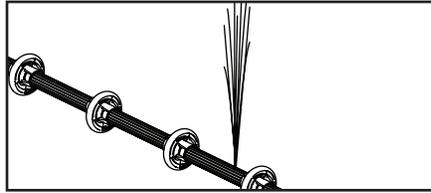

## SWEEP HOSE ROLLERS


The Sweep hose rollers are wear parts. When the rollers wear-down to the outer groove (wear line) replace the wear roller.

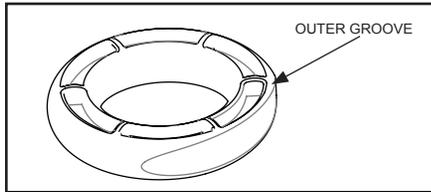

## DEBRIS BAG

The debris bag should be replaced if it is torn.

PART NUMBER: AX5500BFA

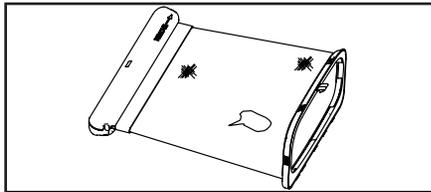


## SWIVELS

If a swivel ceases to turn easily or leaks while the cleaner is running, it should be replaced.


PART NUMBER: AX5000SA

\*Jetted swivel PART NUMBER: AX5000JSA

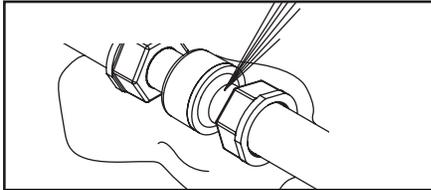


## TIRES

The tires are wear parts. When the tires wear-down to the wear marks replace the tire.

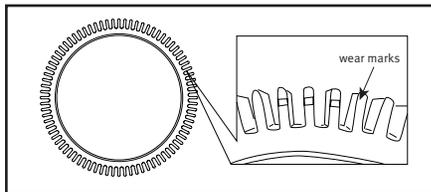

## SIDE ROLLERS

The side rollers are wear parts. When the side rollers wear-down, replace the side rollers.

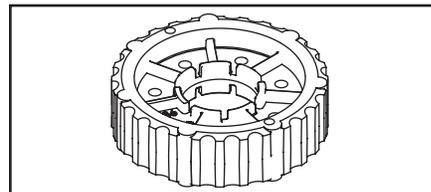

# TROUBLESHOOTING

FOR TECHNICAL ASSISTANCE

CALL: 1-800-227-1477

PROBLEM	CAUSE	SOLUTION
Slow or no forward movement	Low or no water pressure	Check filtration and booster pumps, valves, cleaner connections. Check Cleaner pressure.
Cleaner does not reach farthest point in pool	Hose too short	Check hose length
Hose frequently tangles	Float not properly placed	Check float is centered on the two-foot hose connected to the pipe closest to the cleaner
	Hose too long	Check hose length
	Sweep hose not moving	Check sweep hose for holes or clogs, increase sweep hose power.
Sweep hose sprays out of pool	Sweep hose power too strong	Reduce sweep hose power
Little or no sweep hose movement	Sweep hose power too weak	Increase hose power
	Hole in sweep hose	Replace sweep hose
	Debris clogging sweep hose	Disconnect sweep hose and flush out
Trivac running on side or upside down	Heavy debris	Empty Bag
	Pressure too high	Check operating pressure
Cleaner cannot climb to the surface in TOP mode	Pressure too high or too low	Check operating pressure
	Too much heavy debris in bag	Empty bag
Cleaner runs in small circles	Hose on hose cleaner end assembly bent	Layout in sun until straight

# WARRANTY

A limited warranty program protects your HAYWARD TRIVAC 700 cleaner. To take full advantage of the limited warranty, please, read, complete and return registration card within the 14 days of purchase date. Your warranty card is packed in the Owner's Guide and accessory pack.

## HAYWARD POOL PRODUCTS LIMITED WARRANTY

To original purchasers of this equipment, Hayward Pool Products, Inc, warrants these cleaners to be free from defects in materials and workmanship for a period of TWO (2) year from the date of purchase, when used in single family residential applications.

The limited warranty excludes damage from freezing, negligence, improper installation, improper use or care or any Acts of God. Parts that fail from a defect or become defective during the warranty period shall be repaired or replaced, at our option, within 90 days of the receipt of defective product, barring unforeseen delays, without charge.

Proof of purchase is required for warranty service. In the event proof of purchase is not available, the manufacturing date of the product will be the sole determination of the purchase date.

To obtain warranty service, please contact the place of purchase or the nearest Hayward Authorized Service Center. For assistance on your nearest Hayward Authorized Service Center please visit us at [www.hayward-pool.com](http://www.hayward-pool.com).

Hayward shall not be responsible for cartage, removal, repair or installation labor or any other such costs incurred in obtaining warranty replacements or repair.

The Hayward Pool products warranty does not apply to components manufactured by others. For such products, the warranty established by the respective manufacturer will apply.

The express limited warranty above constitutes the entire warranty of Hayward Pool Products with respect to its' pool products and is in lieu of all other warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose. In no event shall Hayward Pool products be responsible for any consequential, special or incidental damages of any nature.

Some states do not allow a limitation on how long an implied warranty lasts, or the exclusion of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

# REGISTRATION CARD

DETACH HERE: Fill out bottom portion completely and mail within 10 days of purchase/installation or register online

## WARRANTY REGISTRATION CARD

Register online at [www.haywardnet.com](http://www.haywardnet.com)

Please Print Clearly:

First Name \_\_\_\_\_

Last Name \_\_\_\_\_

Street Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone Number \_\_\_\_\_ Purchase Date \_\_\_\_\_

E-Mail Address \_\_\_\_\_

Serial Number \_\_\_\_\_

Model Number \_\_\_\_\_

Pool Capacity \_\_\_\_\_ (U.S. Gallons)

Please include me on all e-mail communications regarding Hayward® Equipment or promotions.

Mail to: Hayward Pool Products, 620 Division Street, Elizabeth, NJ 07207

Attn: Warranty Dept  
or REGISTER YOUR WARRANTY ON-LINE AT [WWW.HAYWARDNET.COM](http://WWW.HAYWARDNET.COM)

Years Pool has been in service

< 1 year  1-3  4-5  6-10  11-15  >15

Purchased from

Builder  Retailer  Pool Service  Internet/Catalog

Company Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone \_\_\_\_\_

Type of Pool:

Concrete/Gunite  Vinyl  Fiberglass

Other \_\_\_\_\_

New Installation  Replacement

Installation for:

In Ground  Above Ground  Spa

Thank you for your purchase.



---

Hayward Pool Products  
620 Division Street | Elizabeth, NJ 07201  
[www.Hayward-Pool.com](http://www.Hayward-Pool.com)