


5 YEARS OF WARRANTY



Wound semi-commercial filter

- **Fiberpool® Technology** bobbin wound sand filters
- **Wide range of diameters: 500 mm up to 1200 mm**
- **Maximum pressure: 2.5 bar**
- **Operating pressure: 0.5 to 2.5 bar**
- From 900 to 1200 mm: available with 6 way valve included
- From 1050 to 1200 mm : 90 mm flange connection
- Usages: for residential or semi-commercial pools

FIBERPOOL®
Technology

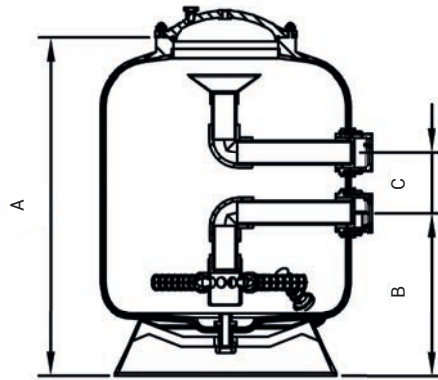

Reference	Diameter (mm)	Connection (mm)	Flow at 30m³/h/m²	Flow at 50m³/h/m²	Weight (kg)	Filtration area (m²)	Sand (0.4-0.8) weight (kg)	Dimensions		
								A	B	C
HCFE352I2WVA	900	vanne 2"	19	32	64	0.63m²	450	950	435	141
HCFE402I2WVA	1050	vanne 2"	26	-	120	0.86	700	1256	600/510	141/285
HCFE403I2WVA	1050	vanne 3"	26	43	125	0.86	700	1256	600/510	141/285
HCFE473I2WVA	1200	vanne 3"	34	56	150	1.13	1125	1328	570	310
HCFE40902WVA	1050	90	34	56	150	1.13	-	1256	600/510	141/285
HCFE47902WVA	1200	90	34	56	150	1.13	1125	1328	570	310

Filter also available in diameter 500, 600 and 750 mm on demand

Filter ref	In/Out	Number of valve positions	Ref
HCFE352I2WVA - HCFE402I2WVA	2"	6	HCV275WE white valve 2"
HCFE403I2WVA - HCFE473I2WVA	3"	6	HCV375E

VALVES FOR SAND FILTERS