


2 YEARS OF WARRANTY




IE3 ✓

High-performance pumps

- Pump made of glass-fibre reinforced thermoplastics
- Lightweight and easy to install
- The three-phase motors are compliant with the IE3 standard
- Turbine made of reinforced Noryl
- This pump is suitable to be used for salt water and sea water
- High-performance TEFC motor
- Strainer with transparent cover for easy maintenance
- Twist-lock closing includes diameter 75 socket unions.
- Operates at 50 Hz / 2850 rpm, IP55, class F insulation
- For 60 Hz, please contact us
- Usages: large pools, spas, water features

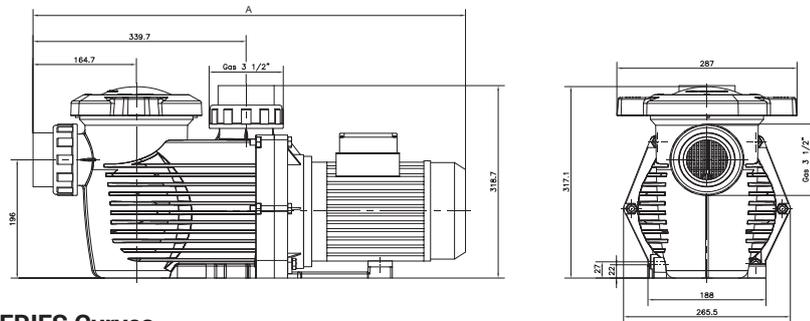

➤ HCP 3600 SERIES Curves

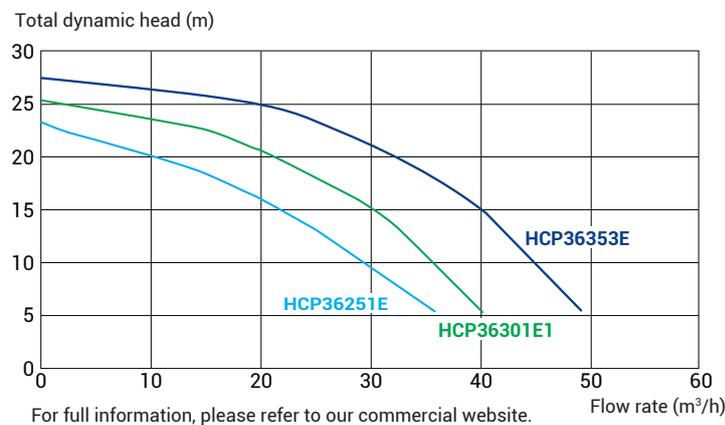

Reference	Type (HP)	Input power P1 (kW)	Flow rate* (m³/h)	Inlet / Outlet (mm)	Weight (kg)	Model	Amperage (A)	Dim A (mm)
HCP36251E	2.5	2.4	30	75	24	Single-phase 230V	12.5	669
HCP36253E1	2.5	2.4	30	75	24	Three-phase 230 / 400V	8.3 / 4.8	669
HCP36301E1	3	2.8	36	75	26	Single-phase 230V	8.8 / 5.1	669
HCP36303E1	3	2.8	45	75	24	Three-phase 230 / 400V	11.7 / 6.75	669
HCP36353E1	3.5	3.4	45	75	27	Three-phase 230 / 400V	8.8 / 5.1	710
HCP36253E	2.5	-	30	75	-	Three-phase 230 / 400V	14.5	669
HCP36303E	3	-	36	75	-	Three-phase 230 / 400V	8.8 / 5.1	669
HCP36353E	3.5	-	36	75	-	Three-phase 230 / 400V	12.1 / 7	710

IE3 ✓

IE3 ✓

IE3 ✓

* under 10m water column pressure

HCP 3600 SERIES