




Fibreglass-reinforced laminated polyester filters

- Attractive gelcoat gloss finish
- Wide range: 950 mm to 1400 mm diameters
- Operating pressures: 0.5 to 1.4 bar
- Maximum pressure: 1.6 bar
- Testing pressure: 2.5 kg/cm²
- Filtration bed depth: 0.8m
- Wide 400 mm top opening
- Arm collector as standard
- Uses: large pools, water park, semi-commercial pools

Dimensions

Ø (mm)	950	1100	1200	1400
A (mm)	1200	1200	1200	1200
B (mm)	595	590	595	570
C (mm)	845	840	845	820
D (mm)	850	850	850	850
F (mm)	950	1100	1200	1400
Filtration area (m ²)	0.70	0.95	1.13	1.54
Flow m ³ /h	35	47.5	56	77

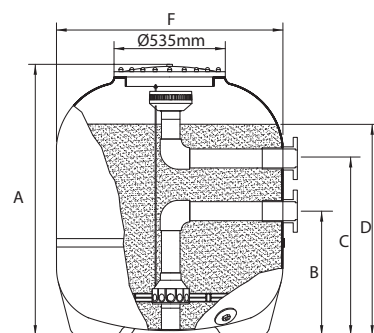

Ref	Diameter (mm)	Connection (mm)	Flow rate at 50m ³ /h/m ²	Filtration area (m ²)	Sand (Kg) (0.4-0.8mm)	Glass (Kg)	Weight (kg)	Unassembled Batteries Reference
HCFM37752LVA	950	75	35	0.70	975	880	66	HCB754E
HCFM43902LVA	1100	90	47.5	0.95	1 325	1 200	84k	HCB904E
HCFM47902LVA	1200	90	56	1.13	1 575	1 420	94	HCB904E
HCFM551102LVA	1400	110	77	1.54	1 750	1 580	128	HCB1104E