



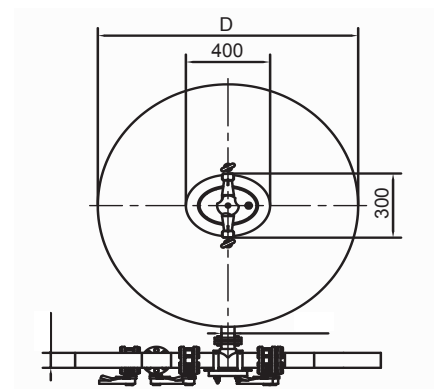

Polyester sand filters

- Fibreglass-reinforced laminated polyester filters
- Attractive **gelcoat gloss finish**
- Wide range: **1050 mm to 2500 mm diameters**
- **Operating pressures: 0.5 to 2 bar**
- Maximum pressure: **2.5 bar**
- **Filtration bed depth: 1m**
- **Wide 400x300 mm top opening** for easy maintenance
- Arm collector as standard
- Installation: singly or banked to increase filtration capacity
- **Uses: large pools, water park**

Dimensions								
Ø (mm)	1050	1200	1400	1600	1800	2000	2350	2500
A (mm)	1800	1800	1800	1800	2000	2000	2250	2250
B (mm)	550	550	550	550	600	600	700	750
C (mm)	600	600	600	720	720	800	800	900
D (mm)	1050	1200	1400	1600	1800	2000	2350	2500
Filtration area (m ²)	0.86	1.13	1.54	2.01	2.54	3.14	4.34	4.90
Volume (m ³)	2.13	2.77	3.77	4.93	6.93	8.56	13.30	16.50

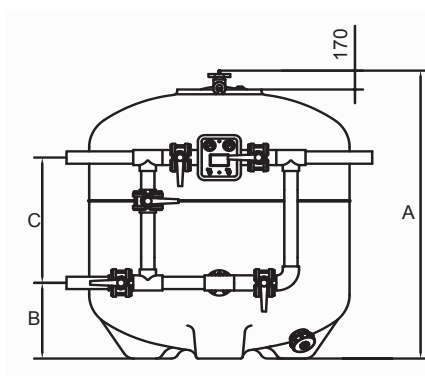

Additional options on request:

- Maximum pressure 4 bar
- Nozzle plate
- Filtration bed depth 1.2m
- Lateral sight glass
- Manometer panel
- Side manhole